

- UTILITY REQUIREMENTS**
- CW — COLD WATER — 3/4" NPT
 - HW — HOT WATER — 1/2" NPT
 - D — DRAIN — 1-1/2" NPT
 - E — ELECTRICAL — 115 V., 1 PH., 60 Hz., 30 AMP.
 - EX — EXHAUST — (2) @ 4 x 30, 750 CFM
 - A/CW2 — COLD WATER — 3/4" NPT

DISSECTION STATION

Designed for dissecting, the 30-96 model is a compact, stationary dissecting table supported by six sturdy legs with adjustable bullet feet

STANDARD DESIGN FEATURES



- * All stainless steel
- * Heliarc welded seams and joints, ground and polished to a smooth finish.
- * Tabletop slopes toward drain outlet for easy drainage
- * Six adjustable bullet feet allow for table leveling.

FOR APPROVAL ONLY

ONE (1) SET OF APPROVAL PRINTS MUST BE SIGNED AND RETURNED TO TBU INC. BEFORE EQUIPMENT CAN BE RELEASED FOR PRODUCTION

- ☐ APPROVED AS DRAWN
☐ FOR FABRICATION
☐ NOT APPROVED — REVISE & RESUBMIT FOR FINAL APPROVAL

SIGNED _____
DATE _____

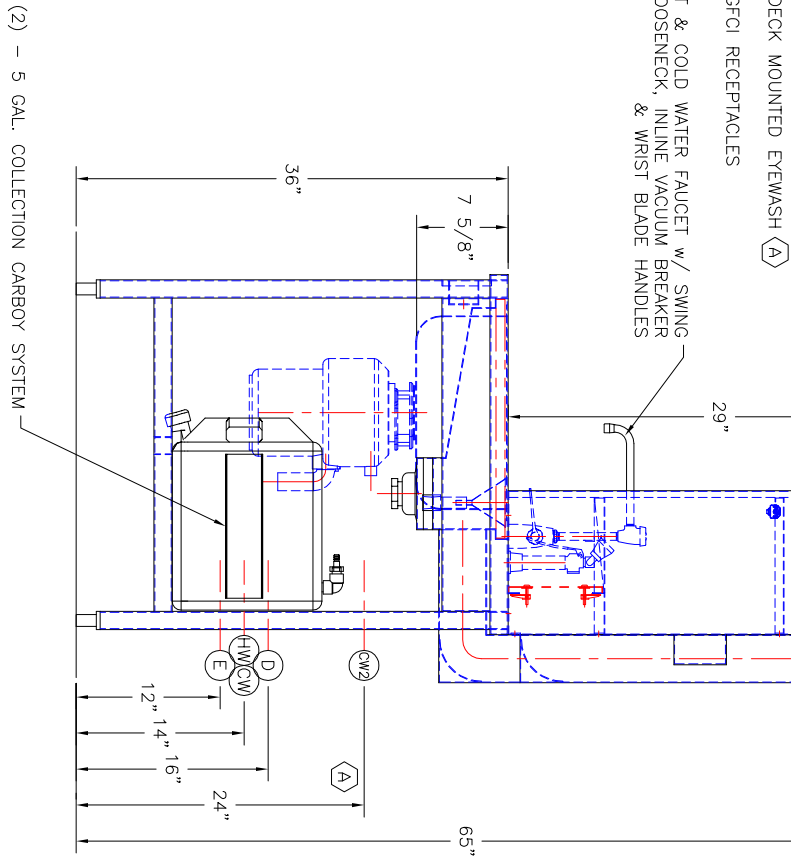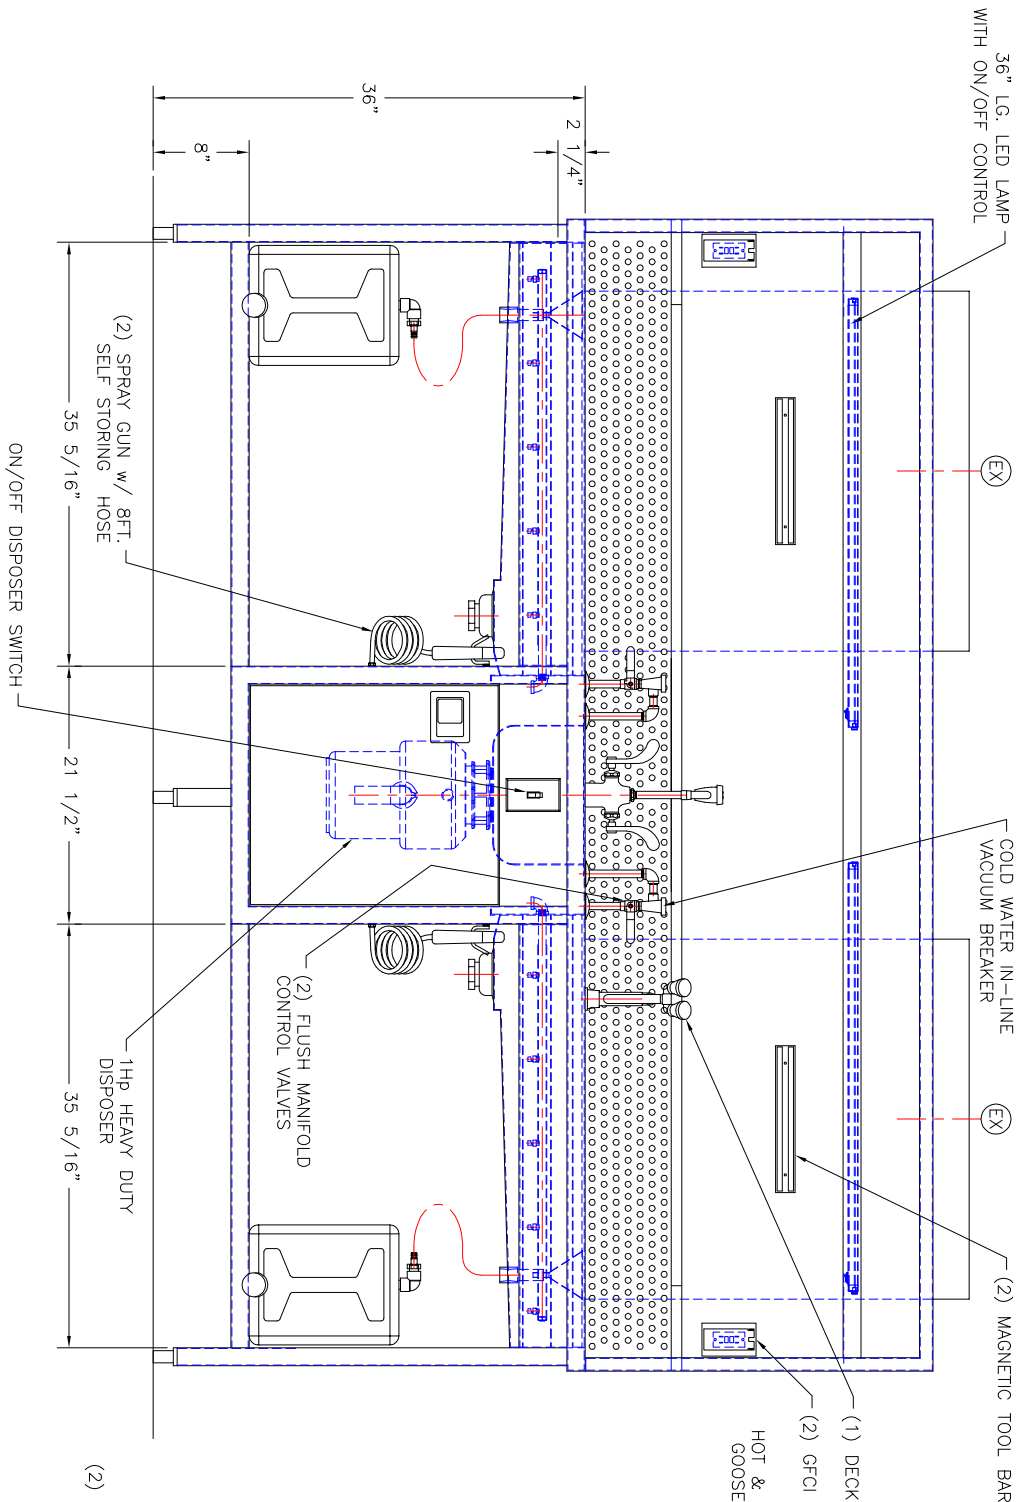

UNLESS OTHERWISE SPECIFIED			
TOLERANCES IN INCHES:			
FRACTIONAL ± 1/32			
ANGULAR ± 0°25'			
ONE DECIMAL ± 0.063			
TWO DECIMAL ± 0.031			
THREE DECIMAL ± 0.015			
NAME	DATE	NAME	DATE
PRD. RELEASE		30-96	DOWNDRAFT/BACKDRAFT WORKSTATION
APPR. RELEASE		ROUGH-IN ASSEMBLY	R18038
REVIEWED BY			
ENG APPR.			